

MINITEMP™

Portable Infrared Thermometer



Noncontact Temperature Measurement



MiniTemp™

The new way to measure temperatures

Raytek MiniTemp is pocket-sized and easy to use—just point, shoot and read the temperature on the large backlit display. When you need a fast, easy, safe way to measure surface temperature, you need a MiniTemp noncontact thermometer. Use MiniTemp at work, at home, anywhere.

The unit is powered by a 9V battery and displays temperatures in either °C or °F. An accessory pack including a pouch and wrist strap is also available. Laser sighting (Laser Point™) helps targeting.

APPLICATIONS

Automotive - Troubleshoot engines including ignition system problems and fuel/air adjustments. Diagnose cooling systems including thermostats and coolant sensors; radiators; brakes; and tires.

HVAC - Balance room temperatures, monitor supply/return registers, check furnace performance, perform energy audits, and check window insulation.

Electrical - Check electrical panels for hot spots, find defective transformers, and detect loose electrical connections.

Food safety - Check holding, serving, and storage temperatures, maintain freezers, ovens, ranges, and dishwashers.

And more - Hundreds of work, home, and recreational applications.


- Simple to use
- Instant readings
- Laser Point™
- Large, easy to read display
- Temperature Range
-18° to 275°C
- °C or °F selectable

MINITEMP Specifications

Temperature range	-18 to 275°C
Accuracy (23°C ambient temperature)	-1°C to 275°C ±2% or ±2°C whichever is greater -18°C to -1°C ±3°C
Repeatability	±2% of reading, or ±2°C, whichever is greater
Response time	500 mSec, 95% response
Spectral response	7–18 µm
Emissivity*	pre-set 0.95
Ambient operating range	0 to 50°C
Relative humidity	10–95% RH noncondensing, @ up to 30°C
Storage temperature	-20° to 65°C without battery
Weight / Dimensions	227 g ; 152 x 101 x 38 mm
Power	9V Alkaline or NiCd battery (included)
Battery life (Alkaline)	12 hrs
Laser Class II	Yes
Typical distance to target (Spot)	Up to 1.5 m
Distance to spot (D:S)	8:1 (see diagram)
Additional options/Accessories	Nylon holster


*For more information on emissivity for unique applications visit
www.raytek.com/emissivity.htm

Optical Resolution

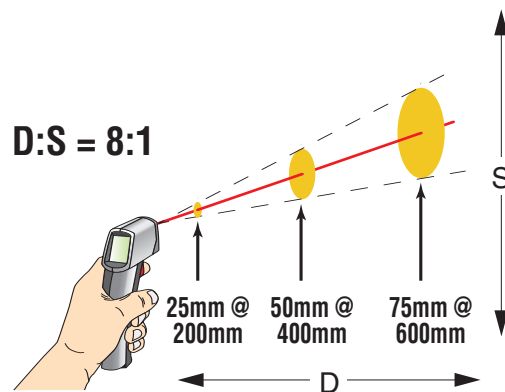

The MiniTemp is intended for close range targets, measuring a minimum target area of 25 mm in diameter out to a distance of approximately 200 mm, and has a 150 mm target measurement area at 1.5 m.

Laser Sighting



Laser Point™ Single-point laser indicates the approximate center of the target spot.

www.raytek.com

for up-to-the-minute features

Worldwide Headquarters

Raytek Corporation
Santa Cruz, CA USA
Tel: 1 800 227 8074
1 831 458 1110
Fax: 1 831 458 1239
info@raytek.com

China

Tel: 86 10 6437 0284
Fax: 86 10 6437 0285
info@raytek.com.cn

Japan

Tel: 81 3 5733 6065
Fax: 81 3 5733 6099
info@raytekjapan.co.jp

South American Headquarters

Raytek do Brasil
Sorocaba, Brasil
Tel: 55 15 233 6338
Fax: 55 15 233 6826
info@raytek.com

European Headquarters

Raytek GmbH
Berlin, Germany
Tel: 49 30 4 78 00 80
Fax: 49 30 4 71 02 51
raytek@raytek.de

United Kingdom

Tel: 44 1908 630800
Fax: 44 1908 630900
ukinfo@raytek.com

France

Tel: 33 1 64 53 1540
Fax: 33 1 64 53 1544
info@raytek.fr



© 2004 Raytek (56003 Rev. E) 09/2004
Raytek and the Raytek logo are registered trademarks, and MiniTemp and Laser Point are trademarks of Raytek Corporation. Specifications subject to change without notice. Raytek is ISO 9001:2003 certified.

Raytek®